




Kamio Ring-Lights provide a glamour lighting solution for close ups in film and video photography. The soft, cool Kamio light falls gracefully on the subject's face because it mounts on the lens, unlike conventional on-camera quartz lights that produce heat and shadows. Kamios also display daylight and tungsten quality light without filtration.

The Kamio 6 System

- Kamio 6 Fixture
- 2-stage clip-on matte box
- 12VDC Dimming Ballast
- True Match® daylight and tungsten lamps

▼ Details

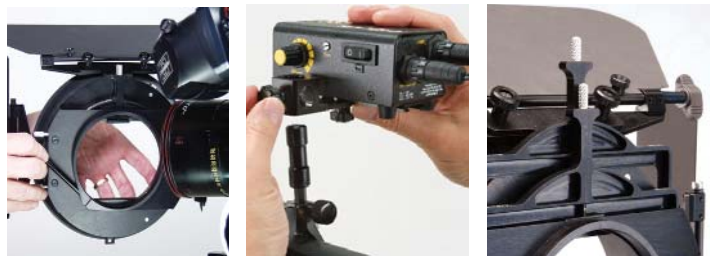

▼ Kamio 6 Kits



KIT-KAM6

Kamio 6 Kit, (On-Camera/2-Stage)

Contents	
1 Kamio 6 Ring-Lite w/ 2-Stage Matte Box	1 15ft Extension
1 Kamio 12VDC On-Camera Ballast	1 Top Barndoor
1 Ballast Mount	2 Side Barndoor
1 Baby Shoe Mount	1 Travel Case
1 6.6 Amp Universal VAC Power Supply	Dimensions
4 Gel Frame	21 x 11 x 15.5"
1 Gel Frame Template	(53.5 x 28 x 39.5cm)
	Weight
	22 lb (9.9kg)



KIT-KAM6-C

Kamio 6 Basic Kit, (On-Camera/2-Stage)

Contents	Dimensions
1 Kamio 6 Ring-Lite w/ 2-Stage Matte Box	21 x 7.5 x 17"
1 Kamio 12VDC On-Camera Ballast	(53.5 x 19 x 43cm)
1 Ballast Mount	Weight
1 Baby Shoe Mount	10 lb (4.5kg)
1 Travel Case	



SYS-KAM6

Kamio 6 System, (On-Camera/2-Stage)

Contents
1 Kamio 6 Ring-Lite w/ 2-Stage Matte Box
1 Kamio 12VDC On-Camera Ballast
1 Ballast Mount
1 Baby Shoe Mount

▼ Kamio Lamps



06C-K32
6" Kino KF32
Kamio Lamp

06C-K55
6" Kino KF55
Kamio Lamp

▼ Photometrics

Kamio	FC	235	64	29	16	10
	Feet	1	2	3	4	5
	LUX	3434	1023	452	259	166
	Meters	0.25	0.5	0.75	1	1.25

▼ Fixture Specifications

Fixture	Lamp	Lamp Type	Dimensions	Weight w/Lamp
Kamio 6	1	FC20/T5	10 x 9 x 2.5" (25.5 x 23 x 6.5cm)	1.2 lb (0.5kg)

▼ Ballast Specifications

Ballast	Input Voltage	Output Frequency	Dimming	Switching	Amperage Power Ratings	Dimensions	Weight
Kamio	12-24VDC	25kHz	100%-5%	On/Off	12V=30W@2.5Amps 15V=30W@2.0Amps 24V=31W@1.3Amps	4.7 x 2.5 x 2" (11.9 x 6.4 x 5.1cm)	1.0 lb (0.4kg)


▼ Kamio Kit Components

	KAM6 Kamio 6 w/ 2-Stage Matte Box		MTP-141S Baby Shoe Mount (16mm)
	KAM6L Barndoor/Long		PWS-156X Power Supply 6.6A, 100-250VAC/12VDC 4-Pin XLR
	KAM6S Barndoor/Short (2pk)		GFR-KAM6 Gel Frame
	BAL-149X Kamio Ballast (12-24VDC) w/ 4-Pin XLR Cable		GFR-KAM6T Gel Frame Template
	MTP-141 Ballast Baby Mount (16mm)		X04-K15 Extension, 15ft
	KAS-KAM6 Kamio Travel Case		KAS-KAM6-C Kamio Travel Case

▼ Kamio Accessories

	FIL-KAM6 Filter Holder (4x4 or 4x5.65)		PWC-141A Anton Bauer Adapter, 3ft
	MTP-141C Kamio Ballast Clamp w/ Baby Pin (16mm)		PWC-141X Power Cable (4-Pin XLR), 8ft
	MTP-141P Kamio Ballast Mount w/ Screw		HAR-KAM6 Lamp Harness, 3ft

▼ Gallery

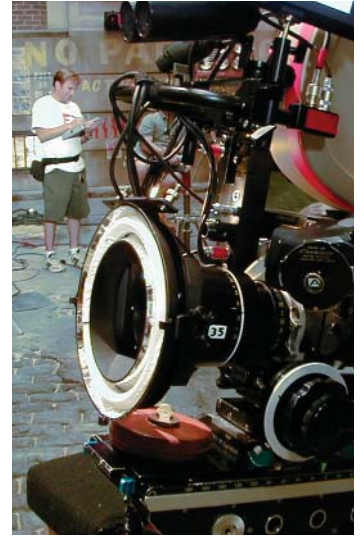

▼ Kamio Adapter Rings*



Lens adapter rings refer to the OUTSIDE diameter of the lenses.



KAM58/85
Screw Ring Adapter 58:85
KAM72/85
Screw Ring Adapter 72:85

Ring Adapter	O.D. Lens	Lens Examples
KAM80	80mm	Zeiss Super Speed Lenses
KAM84	84mm	Panavision Digital Prime Lenses
KAM85	85mm	Many Fujinon and Canon Lenses
KAM86	86mm	Lens Adapter
KAM87	87mm	Zeiss T3 10:1 Zoom Lens
KAM89	89mm	Canon XL1 16X Auto Zoom and 3X Auto Zoom Lenses
KAM93	93mm	Lens Adapter
KAM94	94mm	Canon XL2, 20 x 5.4 - 108mm Zoom Lenses
KAM95	95mm	Zeiss Ultra, Canon Zoom Lenses
KAM98	98mm	Lens Adapter
KAM100	100mm	Fujinon 17 8-160mm Zoom Lens
KAM102	102mm	Zeiss Ultra Primes; Panavision Digital Zooms
KAM104	104mm	Ari Digital Prime Lenses
KAM110	110mm	Cooke Prime S4, Fujinon Zoom Lenses

* Note: Other ring sizes may be available upon request.