


# FAQ

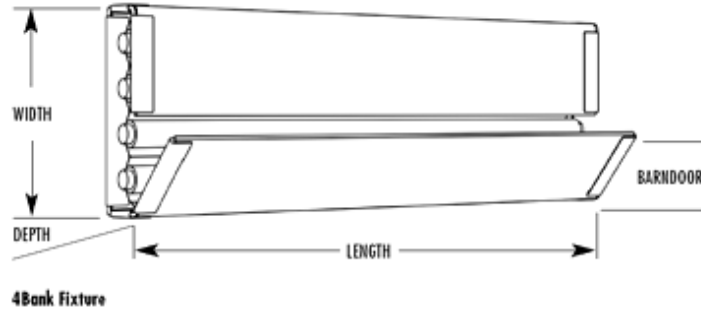

## Remote Fixture Dimensions

[Back to the top](#)

4Bank Fixture	Length	Width	Depth	Barndoor	Weight w/Lamps
2ft 4Bank	27" (68.5cm)	13" (33cm)	3.5" (9cm)	6.5" (16.5cm)	7.5 lb (3.4kg)
4ft 4Bank	52" (132cm)	13" (33cm)	3.5" (9cm)	6.5" (16.5cm)	11.5 lb (5.2kg)
6ft Mega 4Bank	73.5" (186.5cm)	13" (33cm)	3.5" (9cm)	3.5" (9cm)	18.5 lb (8.3kg)
8ft Mega 4Bank	97" (246.5cm)	13" (33cm)	3.5" (9cm)	3.5" (9cm)	21.8 lb (9.8kg)

Double Fixture	Length	Width	Depth	Barndoor	Weight w/Lamps
2ft Double	27" (68.5cm)	7.5" (19cm)	3.5" (9cm)	6" (15cm)	4.7 lb (2.1kg)
4ft Double	52" (132cm)	7.5" (19cm)	3.5" (9cm)	6" (15cm)	7.7 lb (3.5kg)
6ft Mega Double	73.5" (186.5cm)	7.5" (19cm)	3.5" (9cm)	3.5" (9cm)	9.2 lb (4.1kg)
8ft Mega Double	97" (246.5cm)	7.5" (19cm)	3.5" (9cm)	3.5" (9cm)	10 lb (4.5kg)

Single Fixture	Length	Width	Depth	Barndoor	Weight w/Lamps
2ft Single	27" (68.5cm)	4.5" (11.5cm)	3.5" (9cm)	3.5" (9cm)	2.7 lb (1.2kg)
4ft Single	52" (132cm)	4.5" (11.5cm)	3.5" (9cm)	3.5" (9cm)	4.3 lb (1.9kg)
6ft Mega Single	73.5" (186.5cm)	4.5" (11.5cm)	3.5" (9cm)	3.5" (9cm)	6.3 lb (2.8kg)
8ft Mega Single	97" (246.5cm)	4.5" (11.5cm)	3.5" (9cm)	3.5" (9cm)	6.8 lb (3.1kg)
Vista Single	38.3" (97.3cm)	7.2" (18.3cm)	4.8" (12.2cm)	5" (13cm)	6.2 lb (2.8kg)

BarFly Fixture	Length	Width	Depth	Barndoor	Weight w/Lamps
BarFly 100	16" (40cm)	5.5" (14cm)	2.5" (6.5cm)	-	3.2 lb (1.4kg)
BarFly 200	16.5" (41.5cm)	9" (22.5cm)	2.5" (6.5cm)	-	4.9 lb (2.2kg)
BarFly 400	16" (40cm)	17" (43.2cm)	2.5" (6.5cm)	-	7.3 lb (3.3kg)



### Lamp w/ Harness Dimensions [Back to the top](#)

Single Lamp w/ Harness	Length	Diameter
15"	15.5" (39.5cm)	1.5" (3.8cm)
2ft	24.5" (62cm)	1.5" (3.8cm)
3ft	36.5" (93cm)	1.5" (3.8cm)
4ft	48.5" (123cm)	1.5" (3.8cm)
6ft	70.5" (179cm)	1.5" (3.8cm)
8ft	94.5" (240cm)	1.5" (3.8cm)

Mini-Flo Lamp w/ Harness	Length	Width	Height
9"	10.75" (27cm)	0.75" (2cm)	1.5" (3.8cm)
12"	13.75" (35cm)	0.75" (2cm)	1.5" (3.8cm)

Micro-Flo Lamp w/ Harness	Length	Diameter
100cm	4" (100mm)	0.2" (5mm)
150cm	6" (150mm)	0.2" (5mm)

Vista Single Lamp w/ Harness	Length	Width
	35" (89cm)	2.5" (6.5cm)

### Ballast/Fixture Amperage Draw 120VAC\* [Back to the top](#)

Part No.	Description	Amperage 4ft Lamps	Amperage 2ft Lamps	Amperage 15-inch Lamps
BAL-450-120	4Bank DMX, 120VAC	4.6	3.2	2.5
BAL-422-120	Foto-Flo 400, 120VAC	4.8	-	-
BAL-410-S120	4Bank Select, 120VAC	4.3	3.1	2.3
BAL-210-S120	Double Select, 120VAC	2.4	1.6	1.3
BAL-105-S120	Single Select, 120VAC	1.3	0.9	0.7
M12-R4-120	Mult-Flo (12-Unit), 120VAC	13.5	10.5	7.5
BAL-140X	12V Single Ballast	4.6	2.8	1.9
BAL-125-120	Vista Single Ballast	1.7	-	-

Part No.	Description	Amperage 8ft Lamps	Amperage 6ft Lamps
KIT-6X6-M120	Blanket-Lite 6x6, 120VAC	-	22.8
KIT-6X6-DMX120	Blanket-Lite DMX 6x6, 120VAC	-	23.2

BAL-450-M120	Mega 4Bank DMX, 120VAC	7.1	5.8
BAL-410-M120	Mega 4Bank, 120VAC	7.0	5.7
BAL-210-M120	Mega Double, 120VAC	3.8	3.2
BAL-105-M120	Mega Single, 120VAC	2.0	1.8

Part No.	Description	Amperage 6-inch Lamps	Amperage 9-inch Lamps	Amperage 12-inch Lamps
BAL-141X	Kamio 6"	3.0	-	-
BAL-149X	Kamio 6" and Kamio 9"	2.5	3.5	-
BAL-132	Micro-Flo	0.3	-	-
BAL-139X	Mini-Flo 9" and 12"	-	0.8	0.9
BAL-239X	Mini-Flo 9" and 12"	-	1.7	1.8

Part No.	Description	Amperage 4ft Lamps	Amperage 2ft Lamps
CFX-4808	Flathead 80	9.2	-
CFX-W48-X120	Wall-O-Lite DMX-120	11.4	-
IMG-85X-120	Image 85 DMX-120	8.6	-
IMG-80X-120	Image 80 DMX-120	8.6	-
IMG-45X-120	Image 45 DMX-230	4.5	-
IMG-40X-120	Image 40 DMX-120	4.5	-
IMG-20X-120	Image 20 DMX-120	-	2.5

Part No.	Description	Amperage/55 Watt Compact
DIV-400-120	Diva-Lite 400, 120VAC	2.0
DIV-400-120U	Diva-Lite 400 (Universal)	1.8
DIV-200-120	Diva-Lite 200, 120VAC	1.1
PAR-400-S120	ParaBeam 400, 120VAC	2.0
PAR-200-120	ParaBeam 200, 120VAC	1.1
ZIP-400-120	ParaZip 400, 120VAC	2.0
ZIP-200-120	ParaZip 200, 120VAC	1.1

Part No.	Description	Amperage/110 Watt Compact
VIS-6C-120	VistaBeam 600, 120VAC	9.1
VIS-3C-120	VistaBeam 300, 120VAC	4.8

Part No.	Description	Amperage/55 Watt Compact
BAL-107-G120	BarFly 100, 120VAC	1.1
BAL-207-G120	BarFly 200, 120VAC	2.1
BAL-407-G120	BarFly 400, 120VAC	4.0

**\* Reduce amperage by 50% for 230VAC models**