



Rope Hang



Pole-Operation

The Imara® S10 and S6 are studio fixtures with the characteristics of the Image series, but with a more concentrated spread of light along both horizontal and vertical axes. The Imara S10 puts out about the same light output as the VistaBeam 610, yet draws only 5.2A at 120VAC (2.6A at 230VAC). The all-in-one Imara DMX fixtures also feature new levels of control by combining lamp switching and lamp dimming, making them ideal for film production, TV broadcast and digital photography. Both models use Kino Flo's True Match® high color rendering 55W compact lamps (CRI 95) available in tungsten and daylight.

Key features are:

- DMX and manual lamp switching
- DMX and manual lamp dimming
- Reflector, Louver and Gel Frame
- True Match® daylight and tungsten balanced lamps

Available in Yoke Mount and Pole-Op.

▼ Imara S10 DMX



IMR-S10-120
Imara S10 DMX Yoke,
120VAC




IMR-S10-P120
Imara S10 DMX Pole-Op,
120VAC



IMR-S10-230
Imara S10 DMX Yoke,
230VAC



IMR-S10-P230
Imara S10 DMX Pole-Op,
230VAC



GFR-IM10
Imara S10 Gel Frame
(Included)



GFR-IM10
Imara S10 Gel Frame
(Included)



LVR-IM1090
Imara S10 Louver 90°
(Included)



LVR-IM1090
Imara S10 Louver 90°
(Included)

▼ Imara S6 DMX



IMR-S6-120
Imara S6 DMX Yoke,
120VAC



IMR-S6-P120
Imara S6 DMX Pole-Op,
120VAC



IMR-S6-230
Imara S6 DMX Yoke,
230VAC



IMR-S6-P230
Imara S6 DMX Pole-Op,
230VAC



GFR-IM6
Imara S6 Gel Frame
(Included)



GFR-IM6
Imara S6 Gel Frame
(Included)



LVR-IM690
Imara S6 Louver 90°
(Included)



LVR-IM690
Imara S6 Louver 90°
(Included)

▼ Photometrics


Imara S10	FC	1680	580	280	165	108	77	57	44	35	29
	Feet	2	4	6	8	10	12	14	16	18	20
Imara S6	FC	1120	338	158	92	59	44	31	24	19	16
	Feet	2	4	6	8	10	12	14	16	18	20

Imara S10	LUX	20480	8720	4295	2562	1690	1206	904	689	560	454
	Meters	0.5	1	1.5	2	2.5	3	3.5	4	4.5	5
Imara S6	LUX	15830	5211	2465	1432	937	687	490	378	300	244
	Meters	0.5	1	1.5	2	2.5	3	3.5	4	4.5	5

▼ Fixture Specifications

Fixture	Input Voltage	Output Frequency	Amperage	Dimming Range	Lamp Switching	Lamps	Dimensions	Weight w/Lamps
Imara S10 DMX	120VAC 50/60Hz	30kHz	5.2A	100-5%	2/4/6/8/10	10 x 55W CFL	41 x 28 x 7.5" (104 x 71 x 18cm)	33 lb (15kg)
Imara S10 DMX	230VAC 50/60Hz	30kHz	2.6A	100-5%	2/4/6/8/10	10 x 55W CFL	41 x 28 x 7.5" (104 x 71 x 19cm)	33 lb (15kg)
Imara S6 DMX	120VAC 50/60Hz	30kHz	3.2A	100-5%	2/4/6	6 x 55W CFL	27 x 28 x 7.5" (68.5 x 71 x 19cm)	22.5 lb (10kg)
Imara S6 DMX	230VAC 50/60Hz	30kHz	1.5A	100-5%	2/4/6	6 x 55W CFL	27 x 28 x 7.5" (68.5 x 71 x 19cm)	22.5 lb (10kg)

▼ Details

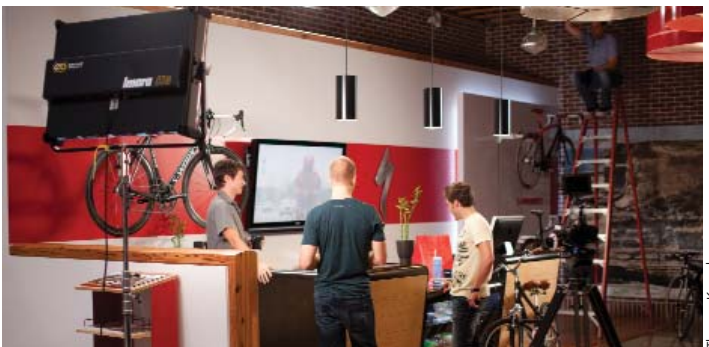

▼ Beam Spread



The Imara utilizes a SoftCut reflector designed to emit a bright, narrow even spread of soft light. The edges of the beam are distinct. This concentration is useful in TV studios and photographic applications where the subject is localized and the spread of light is required to be more directed.



Compare the Imara S10 light beam characteristics open faced and using the 90° and 60° honeycomb louvers.



▼ Imara Accessories/ Lamps

	BRD-IM10 Imara S10 Barndoors		KAS-IM10-1 Imara S10 Ship Case
	BRD-IM6 Imara S6 Barndoors		KAS-IM6-1 Imara S6 Ship Case
	LVR-IM1060 Imara S10 Louver 60°		55C-K32 55W Kino KF32 Compact
	LVR-IM660 Imara S6 Louver 60°		55C-K55 55W Kino KF55 Compact
	MTP-180 Junior Pin Assembly for Yoke (28mm)		
	KAS-CL6 6-Lamp Carry Case (55W Compact)		

▼ Imara S10 DMX Kit



KIT-IM10-1/120
Imara S10 DMX Yoke Mount Kit, 120VAC

KIT-IM10-1/230
Imara S10 DMX Yoke Mount Kit, 230VAC

Contents	Dimensions
1 Imara S10 DMX Yoke	44.5 x 11 x 35.5"
1 Jr. Pin	(113 x 28 x 90cm)
1 Ship Case	Weight
	62.5 lb (28.5kg)

▼ Imara S6 DMX Kit



KIT-IM6-1/120
Imara S6 DMX Yoke Mount Kit, 120VAC

KIT-IM6-1/230
Imara S6 DMX Yoke Mount Kit, 230VAC

Contents	Dimensions
1 Imara S6 DMX Yoke	31 x 11 x 35.5"
1 Jr. Pin	(79 x 28 x 90cm)
1 Ship Case	Weight
	48 lb (22kg)