







True Match® Lamps

TRUE MATCH® lamp color is uniquely formulated by Kino Flo® to match the spectral sensitivity curves of film and digital imaging equipment. High output tungsten and daylight versions (CRI 95) are available in sizes that range from six inches to eight feet, and yet the quality stays consistent within the True Match line. They are soft, energy efficient and cool to the touch. True Match lamps work side by side on the set with traditional tungsten and HMI fixtures without filtration.

For more information on Kino Flo True Match lamps and Visual Effects lamps, see our website at www.kinoflo.com.

Lamp Base Types



True Match® Lamps



KF29®

Part Number	Description	Type	Length	Diameter	Nominal Base	Wattage	Lumens
242-K29	2ft Kino 800ma KF29	F40/T12/HO	24" (600mm)	1.5" (38mm)	G13 Med Bipin	40	1625
488-K29	4ft Kino 800ma KF29	F75/T12/HO	48" (1200mm)	1.5" (38mm)	G13 Med Bipin	75	3320



KF32®

Part Number	Description	Type	Length	Diameter	Nominal Base	Wattage	Lumens
06C-K32	6" Kino KF32 Kamio	FC20/T5	N/A	6" (152mm)	G10q	20	1150
09C-K32	9" Kino KF32 Kamio	FC30/T5	N/A	9" (229mm)	G10q	30	1690
092-K32	9" Kino KF32	F6/T5	9" (212mm)	.6" (15mm)	G5 Mini Bipin	6	280
122-K32	12" Kino KF32	F8/T5	12" (305mm)	.6" (15mm)	G5 Mini Bipin	8	410
152-K32	15" Kino 800ma KF32	F30/T12/HO	15" (360mm)	1.5" (38mm)	G13 Med Bipin	30	1130
242-K32	2ft Kino 800ma KF32	F40/T12/HO	24" (600mm)	1.5" (38mm)	G13 Med Bipin	40	1640
483-K32	4ft Kino T8 KF32	F32/T8	48" (1200mm)	1.0" (26mm)	G13 Med Bipin	32	2080
488-K32	4ft Kino 800ma KF32	F75/T12/HO	48" (1200mm)	1.5" (38mm)	G13 Med Bipin	75	3350
55C-K32	55W Kino KF32 Compact	F55/CFL	21" (530mm)	1.75" (45mm)	2G11 4Pin	55	2800
55Q-K32	55W Kino KF32 Quad	F55/QFL	12.5" (320mm)	3.75" (95mm)	G10q	55	2720
722-K32	6ft Kino 800ma KF32	F100/T12/HO	72" (1800mm)	1.5" (38mm)	G13 Med Bipin	100	4720
962-K32	8ft Kino 800ma KF32	F120/T12/HO	96" (2400mm)	1.5" (38mm)	G13 Med Bipin	120	5770
964-K32	96W Kino KF32 Twin	F96/CFL	34" (860mm)	2" (50mm)	G10q	96	5100



KF55®

Part Number	Description	Type	Length	Diameter	Nominal Base	Wattage	Lumens
06C-K55	6" Kino KF55 Kamio	FC20/T5	N/A	6" (152mm)	G10q	20	1150
09C-K55	9" Kino KF55 Kamio	FC30/T5	N/A	9" (229mm)	G10q	30	1690
092-K55	9" Kino KF55	F6/T5	9" (212mm)	.6" (15mm)	G5 Mini Bipin	6	280
122-K55	12" Kino KF55	F8/T5	12" (305mm)	.6" (15mm)	G5 Mini Bipin	8	410
152-K55	15" Kino 800ma KF55	F30/T12/HO	15" (360mm)	1.5" (38mm)	G13 Med Bipin	30	1100
242-K55	2ft Kino 800ma KF55	F40/T12/HO	24" (600mm)	1.5" (38mm)	G13 Med Bipin	40	1610
483-K55	4ft Kino T8 KF55	F32/T8	48" (1200mm)	1.0" (26mm)	G13 Med Bipin	32	2040
488-K55	4ft Kino 800ma KF55	F75/T12/HO	48" (1200mm)	1.5" (38mm)	G13 Med Bipin	75	3290
55C-K55	55W Kino KF55 Compact	F55/CFL	21" (530mm)	1.75" (45mm)	2G11 4Pin	55	2800
55Q-K55	55W Kino KF55 Quad	F55/QFL	12.5" (320mm)	3.75" (95mm)	G10q	55	2720
722-K55	6ft Kino 800ma KF55	F100/T12/HO	72" (1800mm)	1.5" (38mm)	G13 Med Bipin	100	4620
962-K55	8ft Kino 800ma KF55	F120/T12/HO	96" (2400mm)	1.5" (38mm)	G13 Med Bipin	120	5650
964-K55	96W Kino KF55 Twin	F96/CFL	34" (860mm)	2" (50mm)	G10q	96	5100


True Match® 26W CFL




Part Number	Description	Type	Length	Diameter	Nominal Base	Wattage	Lumens
26S-K32-120	26W Kino KF32, 120VAC	F26/CFL	6.6" (167.6mm)	2.28" (57.9mm)	E26 Screw Base	26	1400
26S-K32-230	26W Kino KF32, 230VAC	F26/CFL	6.6" (167.6mm)	2.28" (57.9mm)	E27 Screw Base	26	1400
26S-K55-120	26W Kino KF55, 120VAC	F26/CFL	6.6" (167.6mm)	2.28" (57.9mm)	E26 Screw Base	26	1400
26S-K55-230	26W Kino KF55, 230VAC	F26/CFL	6.6" (167.6mm)	2.28" (57.9mm)	E27 Screw Base	26	1400

True Match® Lamp Spectral Charts


KF29®



KF32®



KF55®

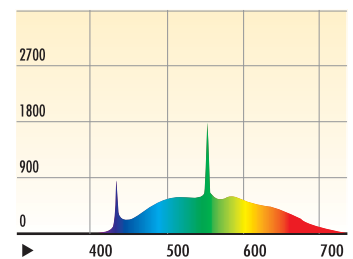

▼ True Match® Lamps—Safety-Coated (SFC)



KF29®—SFC

Part Number	Description	Type	Length	Diameter	Nominal Base	Wattage	Lumens
242-K29-S	2ft Kino 800ma KF29 SFC	F40/T12/HO	24" (600mm)	1.5" (38mm)	G13 Med Bipin	40	1625
488-K29-S	4ft Kino 800ma KF29 SFC	F75/T12/HO	48" (1200mm)	1.5" (38mm)	G13 Med Bipin	75	3320



KF32®—SFC

152-K32-S	15" Kino 800ma KF32 SFC	F30/T12/HO	15" (360mm)	1.5" (38mm)	G13 Med Bipin	30	1130
242-K32-S	2ft Kino 800ma KF32 SFC	F40/T12/HO	24" (600mm)	1.5" (38mm)	G13 Med Bipin	40	1640
488-K32-S	4ft Kino 800ma KF32 SFC	F75/T12/HO	48" (1200mm)	1.5" (38mm)	G13 Med Bipin	75	3350
722-K32-S	6ft Kino 800ma KF32 SFC	F100/T12/HO	72" (1800mm)	1.5" (38mm)	G13 Med Bipin	100	4720
962-K32-S	8ft Kino 800ma KF32 SFC	F120/T12/HO	96" (2400mm)	1.5" (38mm)	G13 Med Bipin	120	5770



KF55®—SFC

152-K55-S	15" Kino 800ma KF55 SFC	F30/T12/HO	15" (360mm)	1.5" (38mm)	G13 Med Bipin	30	1100
242-K55-S	2ft Kino 800ma KF55 SFC	F40/T12/HO	24" (600mm)	1.5" (38mm)	G13 Med Bipin	40	1610
488-K55-S	4ft Kino 800ma KF55 SFC	F75/T12/HO	48" (1200mm)	1.5" (38mm)	G13 Med Bipin	75	3290
722-K55-S	6ft Kino 800ma KF55 SFC	F100/T12/HO	72" (1800mm)	1.5" (38mm)	G13 Med Bipin	100	4620
962-K55-S	8ft Kino 800ma KF55 SFC	F120/T12/HO	96" (2400mm)	1.5" (38mm)	G13 Med Bipin	120	5650

▼ Lamp Safety-Coating Kits

Part Number	Description
SFC-24	2ft Lamp Safety-Coating Kit, 24pk
SFC-48	4ft Lamp Safety-Coating Kit, 24pk
SFC-96	8ft Lamp Safety-Coating Kit, 24pk
SFC-T12	Lamp Boots (T12) and Glue, 50pk



▼ Kino Flo Lamp Tester



Part Number	Description
TST-LAMP	Lamp Tester

The hand-held Kino Flo® Lamp Tester checks for damaged fluorescent tubes and saves the labor of putting lamps into fixtures for testing. The diagnostic pin sockets confirm that the cathodes are in good working order at both ends of the tube. The telescoping antenna excites the phosphors to ensure that the glass is not cracked and gas has not escaped.

▼ New 26W CFL



Part Number	Description
26S-K32-120	26W Kino KF32, 120VAC
26S-K32-230	26W Kino KF32, 230VAC
26S-K55-120	26W Kino KF55, 120VAC
26S-K55-230	26W Kino KF55, 230VAC

Kino Flo's new 26W color-correct CFL is equivalent to a 100W incandescent bulb. It was specially designed for the professional film, photography and video industry. Its unique formula rated at CRI 95 matches the spectral distribution curves of HD cameras. Available in KF32 and KF55, 120VAC and 230VAC.

▼ New KF32




Part Number	Description
092-K32	9" Kino KF32
122-K32	12" Kino KF32
55C-K32	55W Kino KF32 Compact
55Q-K32	55W Kino KF32 Quad
964-K32	96W Kino KF32 Twin

Kino Flo has expanded its award winning True Match® line of full spectrum KF32 lamps to the Mini-Flo, Compact, Quad and Twin line. With its proprietary chemistry, the KF32's color (CRI 95) displays a unique quality of soft light that responds especially well to the new generation of HD equipment. The KF32 works side by side with traditional tungsten sources without corrective filtration and consumes very low power.


Color Lamps

▼ Color Lamp Spectral Charts


Blue 450nm




Green 550nm




Gold 580nm



Pink 612nm



Red 625nm



▼ Visual Effects



Blue & Green Screen

Part Number	Description	Type	Length	Diameter	Nominal Base	Wattage
242-K10	2ft Kino 420 Blue	F40/T12/HO	24" (600mm)	1.5" (38mm)	G13 Med Bipin	40
242-K5	2ft Kino 525 Green	F40/T12/HO	24" (600mm)	1.5" (38mm)	G13 Med Bipin	40
488-K10	4ft Kino 800ma 420 Blue	F75/T12/HO	48" (1200mm)	1.5" (38mm)	G13 Med Bipin	75
488-K5	4ft Kino 800ma 525 Green	F75/T12/HO	48" (1200mm)	1.5" (38mm)	G13 Med Bipin	75
55C-K10	55W Kino 420 Blue Compact	F55/CFL	21" (530mm)	1.75" (45mm)	2G11 4Pin	55
55C-K5X	55W Kino 550 Green Compact	F55/CFL	21" (530mm)	1.75" (45mm)	2G11 4Pin	55
55Q-K10	55W Kino 420 Blue Quad	F55/QFL	12.5" (320mm)	3.75" (95mm)	G10q	55
55Q-K5X	55W Kino 550 Green Quad	F55/QFL	12.5" (320mm)	3.75" (95mm)	G10q	55
964-K10	96W Kino 420 Blue Twin	F96/CFL	34" (860mm)	2" (50mm)	G10q	96
964-K5X	96W Kino 550 Green Twin	F96/CFL	34" (860mm)	2" (50mm)	G10q	96

Designer Colors

488-K4	4ft Kino 800ma 450 Blue	F75/T12/HO	48" (1200mm)	1.5" (38mm)	G13 Med Bipin	75
488-K6	4ft Kino 800ma 580 Gold	F75/T12/HO	48" (1200mm)	1.5" (38mm)	G13 Med Bipin	75
488-K7	4ft Kino 800ma 612 Pink	F75/T12/HO	48" (1200mm)	1.5" (38mm)	G13 Med Bipin	75
488-K8	4ft Kino 800ma 625 Red	F75/T12/HO	48" (1200mm)	1.5" (38mm)	G13 Med Bipin	75

▼ Visual Effects—Safety-Coated (SFC)



Blue & Green Screen - SFC

Part Number	Description	Type	Length	Diameter	Nominal Base	Wattage
242-K10-S	2ft Kino 420 Blue SFC	F40/T12/HO	24" (600mm)	1.5" (38mm)	G13 Med Bipin	40
242-K5-S	2ft Kino 525 Green SFC	F40/T12/HO	24" (600mm)	1.5" (38mm)	G13 Med Bipin	40
488-K10-S	4ft Kino 800ma 420 Blue SFC	F75/T12/HO	48" (1200mm)	1.5" (38mm)	G13 Med Bipin	75
488-K5-S	4ft Kino 800ma 525 Green SFC	F75/T12/HO	48" (1200mm)	1.5" (38mm)	G13 Med Bipin	75

Designer Colors - SFC

488-K4-S	4ft Kino 800ma 450 Blue SFC	F75/T12/HO	48" (1200mm)	1.5" (38mm)	G13 Med Bipin	75
488-K6-S	4ft Kino 800ma 580 Gold SFC	F75/T12/HO	48" (1200mm)	1.5" (38mm)	G13 Med Bipin	75
488-K7-S	4ft Kino 800ma 612 Pink SFC	F75/T12/HO	48" (1200mm)	1.5" (38mm)	G13 Med Bipin	75
488-K8-S	4ft Kino 800ma 625 Red SFC	F75/T12/HO	48" (1200mm)	1.5" (38mm)	G13 Med Bipin	75



Kino Flo's line of visual effects and color lamps are often used in production design, as seen here on the set of a Lenny Kravitz music video, filmed in Hollywood. The production designer on this job used more than 500 4ft and 2ft daylight, and red and blue colored tubes individually controlled through a DMX system and choreographed to the video's score.