







True Match® Lamps

TRUE MATCH® lamp color is uniquely formulated by Kino Flo® to match the spectral sensitivity curves of film and digital imaging equipment.

High output tungsten and daylight versions (CRI 95) are available in sizes that range from nine inches to eight feet, and yet the quality stays consistent within the True Match line. They are soft, energy efficient and cool to the touch. True Match lamps work side by side on the set with traditional tungsten and HMI fixtures without filtration.

For more information on Kino Flo True Match lamps and Visual Effects lamps, see our website at www.kinoflo.com.

Lamp Base Types



True Match® Lamps



KF29®

Part Number	Description	Type	Length	Diameter	Nominal Base	Wattage	Lumens
092-K29	9" Kino KF29	F6/T5	9" (212mm)	.6" (15mm)	G5 Mini Bipin	6	280
122-K29	12" Kino KF29	F8/T5	12" (305mm)	.6" (15mm)	G5 Mini Bipin	8	410
242-K29	2ft Kino 800ma KF29	F40/T12/HO	24" (600mm)	1.5" (38mm)	G13 Med Bipin	40	1625
488-K29	4ft Kino 800ma KF29	F75/T12/HO	48" (1200mm)	1.5" (38mm)	G13 Med Bipin	75	3320
55C-K29	55W Kino KF29 Compact	F55/CFL	21" (530mm)	1.75" (45mm)	2G11 4Pin	55	2800
55Q-K29	55W Kino KF29 Quad	F55/QFL	12.5" (320mm)	3.75" (95mm)	G10q	55	2720
722-K29	6ft Kino 800ma KF29	F100/T12/HO	72" (1800mm)	1.5" (38mm)	G13 Med Bipin	100	4675
962-K29	8ft Kino 800ma KF29	F120/T12/HO	96" (2400mm)	1.5" (38mm)	G13 Med Bipin	120	5660
964-K29	96W Kino KF29 (Twin)	F96/CFL	34" (860mm)	2" (50mm)	G10q	96	5100



KF32®

06C-K32	6" Kino KF32 Kamio	FC20/T5	N/A	6" (152mm)	G10q	20	150
09C-K32	9" Kino KF32 Kamio	FC30/T5	N/A	9" (229mm)	G10q	30	1690
152-K32	15" Kino 800ma KF32	F30/T12/HO	15" (360mm)	1.5" (38mm)	G13 Med Bipin	30	1130
242-K32	2ft Kino 800ma KF32	F40/T12/HO	24" (600mm)	1.5" (38mm)	G13 Med Bipin	40	1640
483-K32	4ft Kino T8 KF32	F32/T8	48" (1200mm)	1.0" (26mm)	G13 Med Bipin	32	2080
488-K32	4ft Kino 800ma KF32	F75/T12/HO	48" (1200mm)	1.5" (38mm)	G13 Med Bipin	75	3350
55C-K32	55W Kino KF32 Compact	F55/CFL	21" (530mm)	1.75" (45mm)	2G11 4Pin	55	2800
722-K32	6ft Kino 800ma KF32	F100/T12/HO	72" (1800mm)	1.5" (38mm)	G13 Med Bipin	100	4720
962-K32	8ft Kino 800ma KF32	F120/T12/HO	96" (2400mm)	1.5" (38mm)	G13 Med Bipin	120	5770




KF55®


06C-K55	6" Kino KF55 Kamio	FC20/T5	N/A	6" (152mm)	G10q	20	1150
09C-K55	9" Kino KF55 Kamio	FC30/T5	N/A	9" (229mm)	G10q	30	1690
092-K55	9" Kino KF55	F6/T5	9" (212mm)	.6" (15mm)	G5 Mini Bipin	6	280
122-K55	12" Kino KF55	F8/T5	12" (305mm)	.6" (15mm)	G5 Mini Bipin	8	410
152-K55	15" Kino 800ma KF55	F30/T12/HO	15" (360mm)	1.5" (38mm)	G13 Med Bipin	30	100
242-K55	2ft Kino 800ma KF55	F40/T12/HO	24" (600mm)	1.5" (38mm)	G13 Med Bipin	40	1610
483-K55	4ft Kino T8 KF55	F32/T8	48" (1200mm)	1.0" (26mm)	G13 Med Bipin	32	2040
488-K55	4ft Kino 800ma KF55	F75/T12/HO	48" (1200mm)	1.5" (38mm)	G13 Med Bipin	75	3290
55C-K55	55W Kino KF55 Compact	F55/CFL	21" (530mm)	1.75" (45mm)	2G11 4Pin	55	2800
55Q-K55	55W Kino KF55 Quad	F55/QFL	12.5" (320mm)	3.75" (95mm)	G10q	55	2720
722-K55	6ft Kino 800ma KF55	F100/T12/HO	72" (1800mm)	1.5" (38mm)	G13 Med Bipin	100	4620
962-K55	8ft Kino 800ma KF55	F120/T12/HO	96" (2400mm)	1.5" (38mm)	G13 Med Bipin	120	5650
964-K55	96W Kino KF55 (Twin)	F96/CFL	34" (860mm)	2" (50mm)	G10q	96	5100

True Match® Lamp Spectral Charts


KF29®



KF32®



KF55®

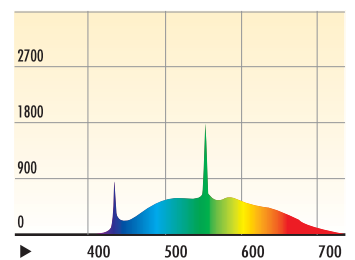

▼ True Match® Lamps—Safety Coated (SFC)



KF29®—SFC

Part Number	Description	Type	Length	Diameter	Nominal Base	Wattage	Lumens
242-K29-S	2ft Kino 800ma KF29 SFC	F40/T12/HO	24" (600mm)	1.5" (38mm)	G13 Med Bipin	40	1625
488-K29-S	4ft Kino 800ma KF29 SFC	F75/T12/HO	48" (1200mm)	1.5" (38mm)	G13 Med Bipin	75	3320
722-K29-S	6ft Kino 800ma KF29 SFC	F100/T12/HO	72" (1800mm)	1.5" (38mm)	G13 Med Bipin	100	4675
962-K29-S	8ft Kino 800ma KF29 SFC	F120/T12/HO	96" (2400mm)	1.5" (38mm)	G13 Med Bipin	120	5660



KF32®—SFC

Part Number	Description	Type	Length	Diameter	Nominal Base	Wattage	Lumens
152-K32-S	15" Kino 800ma KF32 SFC	F30/T12/HO	15" (360mm)	1.5" (38mm)	G13 Med Bipin	30	1130
242-K32-S	2ft Kino 800ma KF32 SFC	F40/T12/HO	24" (600mm)	1.5" (38mm)	G13 Med Bipin	40	1640
488-K32-S	4ft Kino 800ma KF32 SFC	F75/T12/HO	48" (1200mm)	1.5" (38mm)	G13 Med Bipin	75	3350
722-K32-S	6ft Kino 800ma KF32 SFC	F100/T12/HO	72" (1800mm)	1.5" (38mm)	G13 Med Bipin	100	4720
962-K32-S	8ft Kino 800ma KF32 SFC	F120/T12/HO	96" (2400mm)	1.5" (38mm)	G13 Med Bipin	120	5770



KF55®—SFC



Part Number	Description	Type	Length	Diameter	Nominal Base	Wattage	Lumens
152-K55-S	15" Kino 800ma KF55 SFC	F30/T12/HO	15" (360mm)	1.5" (38mm)	G13 Med Bipin	30	1100
242-K55-S	2ft Kino 800ma KF55 SFC	F40/T12/HO	24" (600mm)	1.5" (38mm)	G13 Med Bipin	40	1610
488-K55-S	4ft Kino 800ma KF55 SFC	F75/T12/HO	48" (1200mm)	1.5" (38mm)	G13 Med Bipin	75	3290
722-K55-S	6ft Kino 800ma KF55 SFC	F100/T12/HO	72" (1800mm)	1.5" (38mm)	G13 Med Bipin	100	4620
962-K55-S	8ft Kino 800ma KF55 SFC	F120/T12/HO	96" (2400mm)	1.5" (38mm)	G13 Med Bipin	120	5650

▼ Lamp Safety-Coating Kits

Part Number	Description
SFC-24	2ft Lamp Safety-Coating Kit, 24pk
SFC-48	4ft Lamp Safety-Coating Kit, 24pk
SFC-96	8ft Lamp Safety-Coating Kit, 24pk
SFC-T12	Lamp Boots (T12) and Glue, 50pk



▼ Kino Flo Lamp Tester



Part Number	Description
TST-LAMP	Lamp Tester

The hand-held Kino Flo® Lamp Tester checks for damaged fluorescent tubes and saves the labor of putting lamps into fixtures for testing. The diagnostic pin sockets confirm that the cathodes are in good working order at both ends of the tube. The telescoping antenna excites the phosphors to ensure that the glass is not cracked and gas has not escaped.

▼ T8 Series Lamps



Part Number	Description
483-K32	4ft Kino T8 KF32
483-K55	4ft Kino T8 KF55

Kino Flo has expanded its award winning line of full spectrum fluorescent lamps to address the growing demand for high color rendering lighting in today's energy conserving T8 commercial and residential fixtures.


The Kino Flo T8's deliver the same broad color spectrum that has become the mainstay for the motion picture and photographic industries. When used as set practicals, for normal office or home environments, the Kino Flo T8 lamps color reproduction is second to none. Corporate teleconferencing or simple video chatting at your computer will benefit from the high color rendering, natural light quality not found in off-the-shelf fluorescents.

Our T8 lamps are available in daylight and tungsten, and come in 4ft lengths. The KF32 model is a warm tone lamp designed to match incandescent light. The KF55 model is designed to match daylight.


Color Lamps

▼ Color Lamp Spectral Charts


Blue 450nm




Green 550nm




Gold 580nm



Pink 612nm



Red 625nm



▼ Visual Effects

Blue & Green Screen

Part Number	Description	Type	Length	Diameter	Nominal Base	Wattage
242-K10	2ft Kino 420 Blue	F40/T12/HO	24" (600mm)	1.5" (38mm)	G13 Med Bipin	40
242-K5	2ft Kino 525 Green	F40/T12/HO	24" (600mm)	1.5" (38mm)	G13 Med Bipin	40
488-K10	4ft Kino 800ma 420 Blue	F75/T12/HO	48" (1200mm)	1.5" (38mm)	G13 Med Bipin	75
488-K5	4ft Kino 800ma 525 Green	F75/T12/HO	48" (1200mm)	1.5" (38mm)	G13 Med Bipin	75
55C-K10	55W Kino 420 Blue Compact	F55/CFL	21" (530mm)	1.5" (38mm)	2G11 4Pin	55
964-K10	96W Kino 420 Blue (Twin)	F96/CFL	34" (860mm)	2" (50mm)	G10q	96

Designer Colors

488-K4	4ft Kino 800ma 450 Blue	F75/T12/HO	48" (1200mm)	1.5" (38mm)	G13 Med Bipin	75
488-K6	4ft Kino 800ma 580 Gold	F75/T12/HO	48" (1200mm)	1.5" (38mm)	G13 Med Bipin	75
488-K7	4ft Kino 800ma 612 Pink	F75/T12/HO	48" (1200mm)	1.5" (38mm)	G13 Med Bipin	75
488-K8	4ft Kino 800ma 625 Red	F75/T12/HO	48" (1200mm)	1.5" (38mm)	G13 Med Bipin	75
55C-K5X	55W Kino 550 Green Compact	F55/CFL	21" (530mm)	1.5" (38mm)	2G11 4Pin	55
964-K5X	96W Kino 550 Green (Twin)	F96/CFL	34" (860mm)	2" (50mm)	G10q	96


▼ Visual Effects — Safety Coated (SFC)

Blue & Green Screen - SFC

Part Number	Description	Type	Length	Diameter	Nominal Base	Wattage
242-K10-S	2ft Kino 420 Blue SFC	F40/T12/HO	24" (600mm)	1.5" (38mm)	G13 Med Bipin	40
242-K5-S	2ft Kino 525 Green SFC	F40/T12/HO	24" (600mm)	1.5" (38mm)	G13 Med Bipin	40
488-K10-S	4ft Kino 800ma 420 Blue SFC	F75/T12/HO	48" (1200mm)	1.5" (38mm)	G13 Med Bipin	75
488-K5-S	4ft Kino 800ma 525 Green SFC	F75/T12/HO	48" (1200mm)	1.5" (38mm)	G13 Med Bipin	75

Designer Colors - SFC

488-K4-S	4ft Kino 800ma 450 Blue SFC	F75/T12/HO	48" (1200mm)	1.5" (38mm)	G13 Med Bipin	75
488-K6-S	4ft Kino 800ma 580 Gold SFC	F75/T12/HO	48" (1200mm)	1.5" (38mm)	G13 Med Bipin	75
488-K7-S	4ft Kino 800ma 612 Pink SFC	F75/T12/HO	48" (1200mm)	1.5" (38mm)	G13 Med Bipin	75
488-K8-S	4ft Kino 800ma 625 Red SFC	F75/T12/HO	48" (1200mm)	1.5" (38mm)	G13 Med Bipin	75



Kino Flo's line of visual effects and color lamps are often used in production design, as seen here on the set of a Lenny Kravitz music video, filmed in Hollywood. The production designer on this job used more than 500 4ft and 2ft daylight, and red and blue colored tubes individually controlled through a DMX system and choreographed to the video's score.